

# SourceFlex™ System


## Model SAS-C10

### Call Button Interface

## Installation/Operation



EN55103-1 E1-E5; EN55103-2 E1-E4  
Typical Performance reflects product at publication time exclusive of EMC data, if any, supplied with product. Specifications are subject to change without notice.

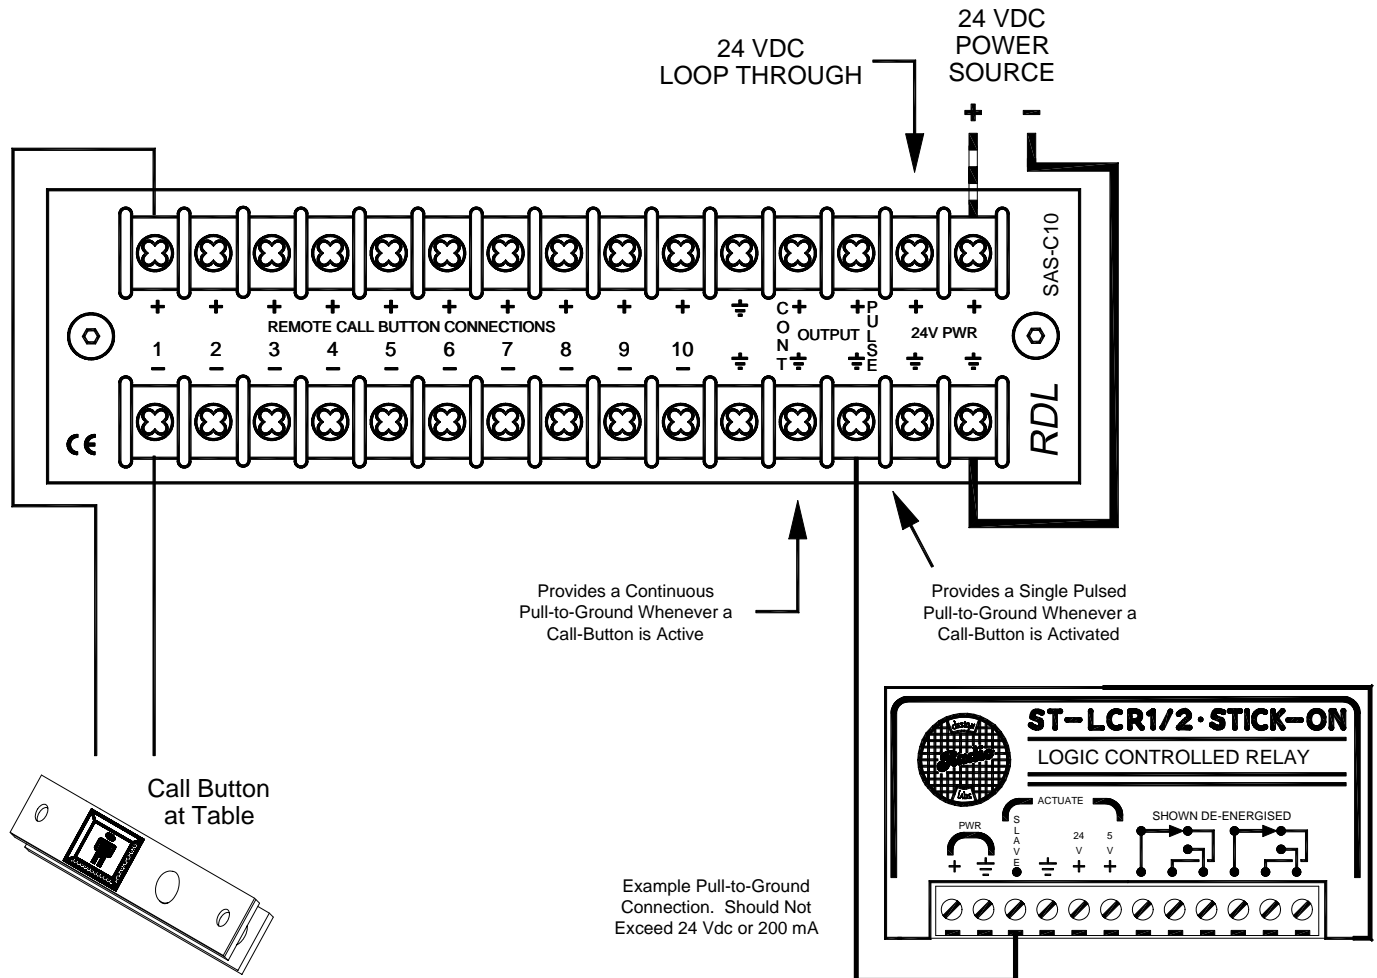

### TYPICAL PERFORMANCE

Power Requirement:

24 to 33 Vdc @ 85 mA (excluding SAS-CB), Ground-referenced